

EUROSTEP MMA COATING

Version 1.0 - December 2024


2 layer system applied at 1 mm finished off with pigmented coating. System is used in areas which are exposed to light-medium duty. Designed for areas such as production halls, warehousing.

APPLICATIONS:

- Production halls
- Warehouses
- Factories
- Balconies

ADVANTAGES:

- Aesthetically pleasing, available in all RAL and NCS colours.
- Fast installation (can be applied up to - 30 degrees Celsius)
- Adjustable level of antislip
- Easy to clean
- Chemical resistance
- Mechanical strength
- Seamless finish
- UV stable topcoat
- Durable

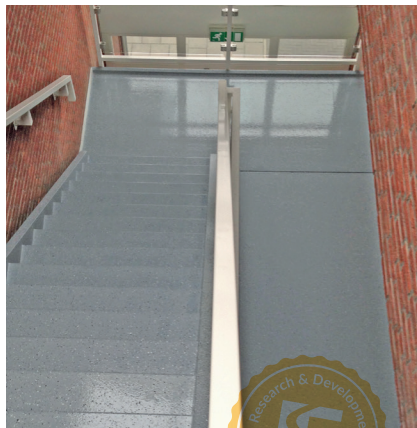

These are some color examples, but most RAL colors are available.



SYSTEM:		Consumption	Packaging	Discription
1 st layer:	Primer Plex 1120	0,4-0,6 kg/m ²	20 kg, 180 kg	Standard primer for concrete and damp concrete
2 nd layer:	Topcoat Plex 1690 coloured	0,7-1 kg/m ²	20 kg	High build MMA coating available in all RAL colours and NCS colours.

